

Unit 1

Introduction of Computer Graphics

Computer graphics is a field related to the generation of graphics using computer. It includes the creation, storage and manipulation of images of object. These objects come from diverse field such as medicine, physical, mathematical, engineering, architecture, entertainment, advertisement.

- It is related to the generation and the representation of graphics by a computer using specialized graphic hardware and software. The graphics can be photographs, drawings, movies, or simulation etc.
- Computer graphics today is largely interactive; that is the user controls the contents structure and appearance of images of the objects by using input devices such as keyboard, mouse, or touch sensitive panel on the screen.

Main task

Imaging: Formation of an image.

- representation of 2D images.

Modelling: Representing 3D images.

Rendering: Constructing 2D images from 3D models.

Animation: Stimulating changes over time.

- describing how objects change in time.


Basic Concepts

Raster: A rectangular array of points and dots.

Pixel (picture element): One dot or picture element of the raster.

Scan line: A row of pixel.

Bit map: Ones and Zeros representation of rectangular array of point on the screen.

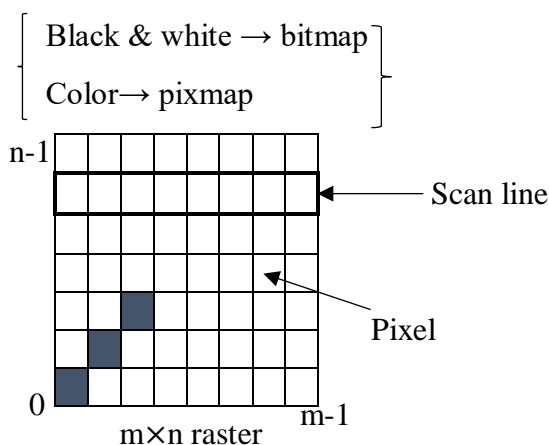

Note: we don't have any pixel like 1.2, 5.8.


Raster device co-ordinate can have only integer values.

Applications of Computer Graphics

Different application area of computer graphics:


- Graphical user interface (GUI)
- Entertainment
- Education and training
- Computer animation
- Simulation and modeling
- Office automation
- Image processing
- Research
- Computer art
- Cartography
- Computer aided design (CAD)

Computer Graphics Vs Image Processing

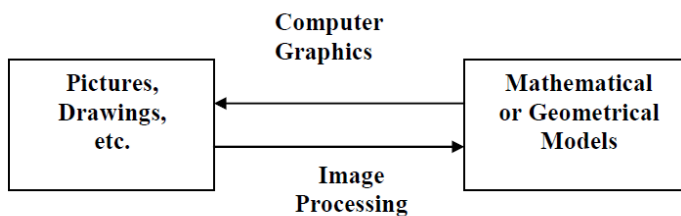

Computer graphics	Image processing
Computer graphics involves in generating images from mathematical or geometrical models.	Image processing involves in analyzing the images to generate mathematical or Geometrical models.
It includes the creation, storage and manipulation of images or objects.	It is the part of computer graphics that handles image manipulation or interpretation.
E.g. Drawing a picture	E.g. Making blur image visible.

Graphics Hardware System

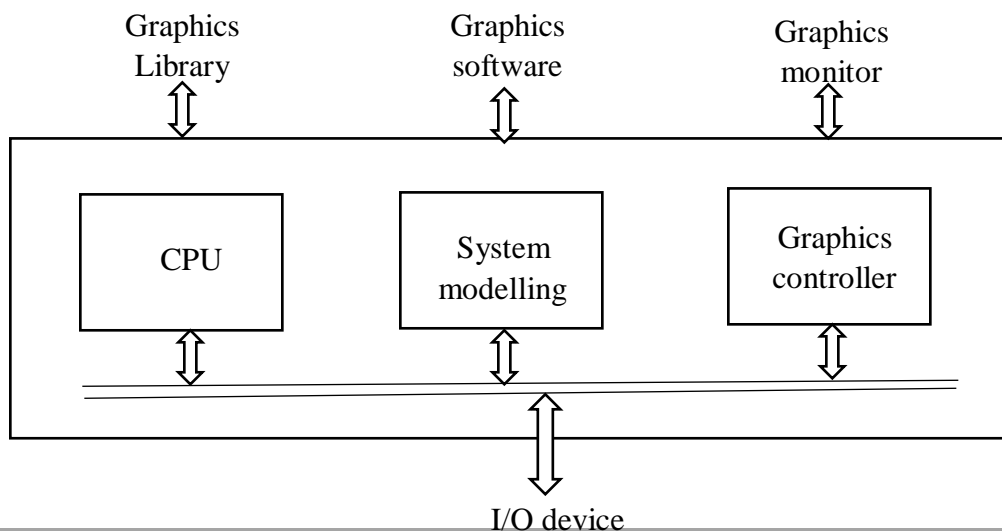

Cathode Ray Tube (CRT)

A CRT is an evacuated glass tube, with a heating element on one end and phosphor-coated screen on the other end.

When current flows through heating filament, the electrons are piled upon the filament. These electrons are attracted by accelerating systems on the phosphor coated screen. When electron strikes on the screen, the phosphor emits a small spot of light at each position contacted by the electron beam. The glowing positions are used to represent the picture in the screen.

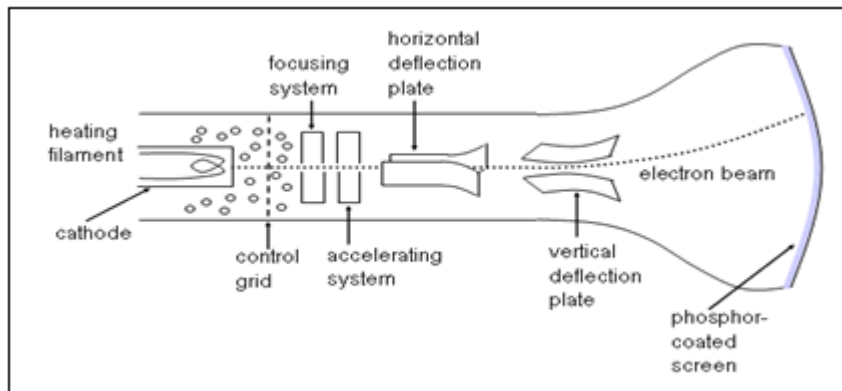


Fig: Cathode-ray tube (CRT)

Fluorescence / Phosphorescence

- When the beam of electron emitted by electron gun strikes phosphor coated screen on the CRT, the phosphor emits a small spot of light at each position contacted by the electron beam, such phenomenon is known as fluorescence / phosphorescence.
- It last just a fraction of millisecond.

Persistence

- How long a phosphor continues to emit light after the electron beam is removed?
- Persistence of phosphor is defined as **time** it takes for emitted light to decay to 1/10 (10%) of its original intensity. Range of persistence of different phosphors can react many seconds.
- The phosphor used for graphics display device usually have persistence of 10 to 60 microsecond.

Resolution

- Resolution is defined as the maximum number of points that can be displayed horizontally and vertically without overlap on display device.

Horizontal scan rate

- The horizontal scan rate is the number of scan lines per second. The rate is approximately the product of the refresh rate and the number of scan lines.

Aspect Ratio

- It gives the ratio of vertical point to horizontal point necessary to produce equal length lines in both directions on the screen.
- An aspect ratio of $\frac{3}{4}$ means that a vertical line plotted with 3 points has the same length as a horizontal line plotted with 4 points.

Refresh Rate

- Light emitted by phosphor fades very rapidly, so to keep the drawn picture glowing constantly; it is required to redraw the picture repeatedly and quickly directing the electron beam back over the some point. The no of times/sec the image is redrawn to give a feeling of non-flickering pictures is called refresh-rate.
- If Refresh rate decreases, flicker develops.
- Refresh rate above which flickering stops and steady it may be called as critical fusion frequency (CFF).

Raster and Vector Graphics


A raster image is made up of pixels, each a different color, arranged to display an image where as a vector image is made up of paths, each with a mathematical formula (vector), that tells the path how it is shaped and what color it is bordered with or filled by.

Raster Graphics	Vector Graphics
Raster graphics are composed of pixels.	Vector graphics are composed of paths.
Raster image pixels do not keep on their appearance as size increases- when you blow a photograph up, it becomes blurry for this reason.	Vector images keep on appearance regardless of size, since the mathematical formulas dictate how the image is rendered.

Display Technologies:

A. Raster Scan display

- In raster scan system, the electron beam is swept across the screen, one row at a time from top to bottom. As electron beam moves across each row, the beam intensity is turned on and off to create a pattern of illuminated spots.
- Picture definition is stored in memory called frame buffer or refresh buffer. This memory holds the set of intensity values for all the screen points. Stored intensity values are then retrieved from the frame buffer and painted on the screen one row at a time.
- Returning of electron beam from right end to left end after refreshing each scan line is called horizontal retrace.
- At the end of each frame, the electron beam returns to the top left corner to begin next frame called vertical retrace.

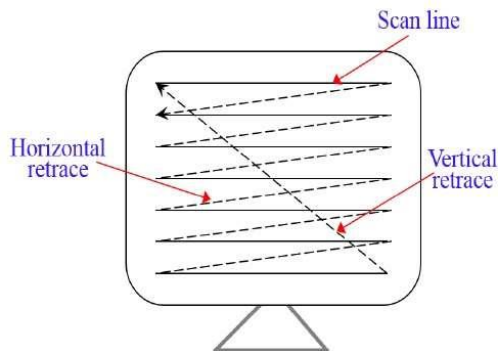

Interlaced vs. non-interlaced scan (refresh procedure)

- In interlaced scan, each frame is displayed in two passes. First pass for odd scan lines and another for even ones.
- In non-interlaced refresh procedure, electron beam sweeps over entire scan lines in a frame from top to bottom in one pass.

Architecture of Raster Scan display system:

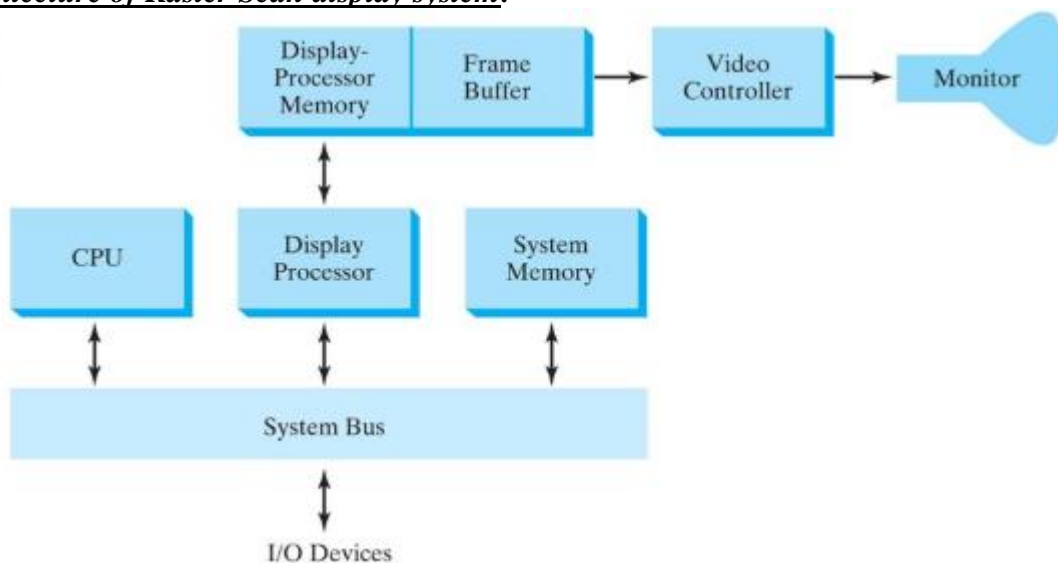


Fig: Architecture of raster-graphics system with a display processor

- There is a special purpose processor called video controller or display controller, is used to control the operation of the display device.
- When a particular command is called by the application program, the graphics subroutine package sets the appropriate pixels in the frame buffer. The video controller then cycles through the frame buffer, one scan line at a time. It will bring a value of each pixel contained in the frame buffer and uses it to control the intensity of the CRT electron beam.
- The display processor is a separate processor that performs graphics function such as scan conversion and raster operation.
- System memory holds data and those program that execute on the CPU.
- The display processor memory holds data plus program that perform scan conversion and raster operation.
- The frame buffer stores displayable image created by scan conversion & raster operation.


Advantages:

- It has an ability to fill the areas with solid colors or patterns
- The time required for refreshing is independent of the complexity of the image
- Low cost

Disadvantages:

- Its resolution is poor.
- For Real-Time dynamics not only the end points are required to move but all the pixels in between the moved end points have to be scan converted with appropriate algorithms which might slow down the dynamic process.

Video controller

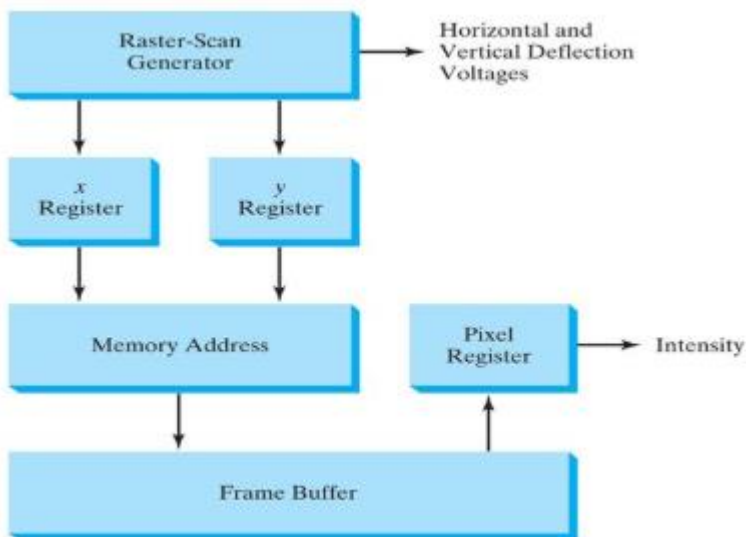

- It is a special-purpose processor used to control the operation of the display device.
- Two Registers (x and y) are used to store screen pixel coordinates.
- Initially, $x = 0$ and $y = 0$
- As first scan line is generated, the x register is incremented up to x_{max} . Each pixel value is fetched and used to control the intensity of CRT beam. After first scan line, x register address is reset to 0 and y register address is incremented by 1. The process is continued until the last scan line ($y = y_{max}$) is generated.

B. Random Scan (Vector) Display

- In random scan system, the electron beam is directed only to the part of screen where the picture is to be drawn. It draws a picture one line at a time, so it is also called vector display.
- Picture definition is stored as a set of line drawing commands in an area of memory called refresh display file.
- To display a picture, the system cycles through the set of commands in the display file. After all commands are processed, the system cycle backs to the first line command in the list.

Architecture of Random Scan system:

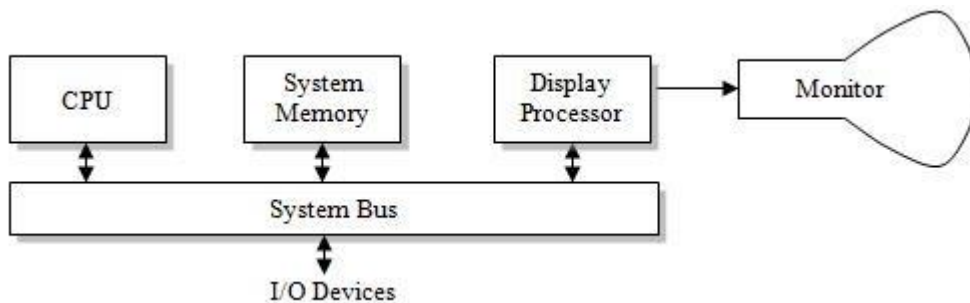


Fig: Architecture of vector display system

- The graphics command in the application program are translated by the graphics package into a display list (display file) stored in system memory. The display list is accessed by the display processor to refresh the screen. The display processor cycles through each command in the display list once during each refresh cycle.
- Graphics are drawn on a vector display system by directing the electron beam along component lines of the picture.

Advantages:

- Can produce output with high resolutions.
- Better for animation than raster system since only end point information is needed.

Disadvantages:

- Cannot fill area with pattern and manipulate bits.
- Refreshing image depends upon its complexity.

C. Color CRT monitor

The CRT displays color picture by using the combination of phosphorous that emits different color light. By combining the emitted light from the different phosphorous range of color can be generate. Two basic technique for producing color display with CRT are:

1. Beam penetration method.
2. Shadow-mask Method.

1. *Beam penetration method:*

- This method is commonly used for random scan system.
- In beam penetration method, two layers of phosphor usually red and green are coated on the CRT screen, and displayed color depends on how far the electron beam penetrates into phosphor layer.
- Slow electron beam excites only the outer red layer.
- Very fast electron beam penetrates through red and excites the inner green layer.
- Intermediate beam speeds produce combination of red and green light.

Limitations:

- Quality of picture is not good as with other methods.
- It is an inexpensive way to produce color in random scan monitors, but only four colors are possible.

2. *Shadow mask method:*

- This method is commonly used in raster scan systems because they can produce wide range of colors than beam penetration.
- A shadow mask CRT has three phosphor color dots at each pixel position. One emits red light, another emits green light and third emits blue light.
- The CRT has three electron guns, one for each color dot and shadow-mask grid is placed just behind the phosphor coated screen.
- Two types of arrangements are there for shadow-mask method:
 - Delta-delta arrangement
 - In-line arrangement

D. Direct-View Storage Tubes (DVST)

- A Direct-View storage tube is a type of CRT that stores the picture information as a charge distribution just behind the phosphor coated screen.
- Two electron guns are used in DVST:
 - **Primary gun:** Used to store the picture pattern.
 - **Flood gun:** Used for maintaining the picture display.

Advantages:

- No refreshing is needed.
- Very complex picture can be displayed at very high resolutions without flicker.

Disadvantages:

- To update any part of image must redraw all parts of image.
 - Ordinarily, do not display color.
 - To erasing and redrawing process can take several second for a picture.
-

E. Flat Panel Display

- Flat-Panel Display refers to a class of video devices that have reduced volume, weight and power requirements compared to CRT.
- There are two categories of flat panel displays:
 - Emissive Displays (or emitters): Emissive displays are device that convert electrical energy into light. E.g. Plasma panels, light emitting diode etc.
 - Non-emissive Displays (or non-emitters): Non-emissive displays use optical effects to convert sunlight or light from other sources into graphics pattern. E.g. Liquid Crystal Display (LCD).

Liquid Crystal Display (LCD): A LCD is a thin, flat display device made up of any number of pixels arrayed in front of light source or reflector. It uses very small amounts of electric power, and is suitable for use in battery-powered electronic devices.

Comparison of Raster scan system and Random scan system

Raster scan system	Random scan system
The electron beam is swept across the screen, one row at a time, from top to bottom.	The electron beam is directed only to the parts of screen where a picture is to be drawn.
Its resolution is poor.	Its resolution is good.
Picture definition is stored as a set of intensity values for all screen point.	Picture definition is stored as a set of line drawing instructions in a display file.
Screen points / pixels are used to draw image.	Mathematical functions are used to draw an image.
Used in system to display realistic images.	Cannot draw realistic shaded scenes.
Cost is low.	Cost is high.
Graphics primitives are specified in terms of their endpoints and must be scan converted into their corresponding pixels in the frame buffer.	Scan conversion is not required.

Some Numerical Problems

Q. Consider a RGB raster system is to be designed using 8 inch by 10 inch screen with a resolution of 100 pixels per inch in each direction. If we want to store 8 bits per pixel in the frame buffer, how much storage do we need for the frame buffer?

Solution:

Size of screen = 8 inch × 10 inch

Pixel per inch (Resolution) = 100

Total no. of pixel = (8*100)*(10*100) = 800000 pixels

Per pixel storage = 8 bit

Total storage required in frame buffer = 800000*8 bits = 6400000 bits

= 6400000/8 bytes = 800000 byte

Q. There is a system with 24 bits per pixel and resolution of 1024 by 1024. Calculate the size of frame buffer.

Solution:

Resolution = 1024×1024

Total number of pixel = $1024 * 1024 = 1048576$ pixels

Per pixel storage = 24 bits

Total storage required in frame buffer = $1048576 * 24 = 25165824$ bits
 $= 25165824 / 8$ byte
 $= 25165824 / (8 * 1024)$ kb
 $= 25165824 / (8 * 1024 * 1024)$ Mb
 $= 3$ Mb

Q. Consider raster system with resolution 1280×1024 .

- a) **How much pixel could be accessed per second by the video controller that refreshes the screen at the rate of 60 frames / second?**
 b) **What is the access time per pixel?**

Solution:

a) No. of pixel accessed per second = $1280 * 1024 * 60 = 78643200$ pixels

b) Since 78643200 pixels are accessed in 1 second

Access time per pixel = $\frac{1}{78643200} = 12.7$ nanosec.

Q. Consider a raster scan system having 12 inch by 12 inch with a resolution of 100 pixels per inch in each direction. If display controller of this system refresh the screen at the rate of 50 frames per second, how many pixels could be accessed per second and what is the access time per pixel of the system.

Solution:

Size of screen = 12 inch \times 12 inch

Resolution = 100 pixels per inch

Total no. of pixels in one frame = $(12 * 100) * (12 * 100)$

Refresh rate = 50 frames per second

i.e. 50 frames can be accessed in 1 sec.

Total no. of pixel accessed in 1 sec = $50 * (12 * 100) * (12 * 100) = 72000000$ pixels

Again,

50 frames can be accessed in 1 sec.

1 frames can be accessed in $1/50$ sec.

$(12 * 100 * 12 * 100)$ frames can be accessed in $1/50$ sec.

Then, 1 pixel can be accessed in $1 / (50 * 12 * 100 * 12 * 100)$ sec.

$= 10^9 / (50 * 12 * 100 * 12 * 100)$ ns

$= 13.88$ ns.

Q. How many k bytes does a frame buffer needs in a 600×400 pixels?

Solution:

Suppose n bits are required to store 1 pixels.

$$\begin{aligned} \text{Then, the size of frame buffer} &= \text{resolution} * \text{bits per pixel} \\ &= (600*400)*n \text{ bits} \\ &= 240000 n/(8*1024) \text{ Kb} \\ &= 29.30 \text{ Kb} \end{aligned}$$

Q. Find the aspect ratio of raster system using 8×10 inches screen and having 100 pixels/inch.

Solution:

We know that,

$$\text{Aspect ratio} = \frac{\text{width}}{\text{height}} = \frac{8*100}{10*100} = \frac{4}{5}$$

So, aspect ratio = 4:5

Q. What is the time required to display a pixel on the monitor of size 1024×768 with refresh rate of 60 Hz?

Solution:

Refresh rate = 60Hz i.e. 60 frames per second

Total no. of pixel in one frame = $1024*768 = 786432$ pixels

60 frames need 1 sec.

1 frame need $1/60$ sec.

786432 pixels need $1/60$ sec.

1 pixel need $1/(60*786432)$ sec. = $10^9/(60*786432)$ ns = 21.19 ns

Q. How much time is spent scanning across each row of pixels during screen refresh on a raster system with resolution 1280×1024 and refresh rate of 60 frames per second?

Solution:

Resolution = 1280×1024

i.e. one frame contains 1024 scan line and each scan line consists of 1280 pixels.

Refresh rate = 60 frames per second

i.e. 60 frames take 1 second.

1 frame takes $1/60$ second.

i.e. 1024 scan line take $1/60$ second i.e. 0.0166 sec.

1 scan line take $0.0166/1024 = 0.016$ sec.

Q. If a pixel is accessed from the frame buffer with an average access time of 300ns then will this rate produce an un-flicking effect for the screen size of 640×480 .

Solution:

Size of screen = 640×480

Total no. of pixels = $640 \times 480 = 307200$

Average access time of one pixel = 300 ns

Total time required to access entire pixels of image in the screen = $307200 \times 300 = 92160000 \text{ ns}$
 $= 92160000 / 10^9 \text{ sec}$
 $= 0.09216 \text{ sec}$

i.e. one cycle take 0.09216 sec.

Now, no. of cycles per second i.e. refresh rate = ?

$0.09216 \text{ sec} = 1 \text{ cycle}$

$1 \text{ sec} = 1 / 0.09216$

$= 10.86$

Refresh rate = 10.86 cycles per second.

Since the minimum refresh rate for unflicker image is 60 frames per second, hence we can say the monitor produces flickering effect.

Q. Calculate the total memory required to store a 10 minute video in a SVGA system with 24 bit true color and 25 fps.

Solution:

The SVGA system allows resolution = 800×600

Refresh rate = 25 fps

i.e. 25 frames take 1 second

1 frame takes $1/25$ second = 0.04 second

Size of video = 10 minutes = $10 \times 60 = 600$ second

Total memory required = $800 \times 600 \times 600 \times 0.04 \times 24 \text{ bit}$
 $= 276480000 / (8 \times 1024 \times 1024) \text{ Mb}$
 $= 32.959 \text{ Mb}$

Graphics Software

There are two general categories of graphics software

- **General programming packages:**
 - Provides extensive set of graphics functions for high level languages (FORTRAN, C etc).
 - Basic functions include those for generating picture components (straight lines, polygons, circles, and other figures), setting color and intensity values, selecting views, and applying transformations.
 - Example: GL(Graphics Library)
- **Special-purpose application packages:**
 - Designed for nonprogrammers, so that users can generate displays without worrying about how graphics operations work.
 - The interface to the graphics routines in such packages allows users to communicate with the programs in their own terms.
 - Example: artist's painting programs and various business, medical, and CAD systems.

Software standards

Primary goal of standardized graphics software is portability. When packages are designed with standard graphics functions, software can be moved easily from one hardware system to another and used in different implementations and applications. International and national standards planning organizations in many countries have cooperated in an effort to develop a generally accepted standard for computer graphics. After considerable effort, this work led to following standards:

- **GKS (Graphical Kernel System):** This system was adopted as the first graphics software standard by the International Standards Organization (ISO) and American National Standards Institute (ANSI). Although GKS was originally designed as a two-dimensional graphics package, a three dimensional GKS extension was subsequently developed.
- **PHIGS (Programmer's Hierarchical Interactive Graphics Standard):** Extension to GKS, Increased Capabilities for object modeling, color specifications, surface rendering and picture manipulations are provided. Subsequently, an extension of PHIGS, called **PHIGS+**, was developed to provide three-dimensional surface-shading capabilities not available in PHIGS.

Although PHIGS presents a specification for basic graphics functions, it does not provide a standard methodology for a graphics interface to output devices (i.e. still **machine dependent**). Nor does it specify methods for storing and transmitting pictures. Separate standards have been developed for these areas:

- **CGI (Computer Graphics interface):** Standardization for device interface
- **CGM (Computer Graphics Metafile):** Standards for archiving and transporting pictures

Coordinate Representations

Normally, graphics packages require coordinate specification to be given with respect to Cartesian reference frames. Each object for a scene can be defined in a separate modeling Cartesian coordinate system, which is then mapped to world coordinates to construct the scene. From world coordinates, objects are transferred to normalized device coordinates, then to the final display device coordinates. The transformations from modeling coordinates to normalized device coordinates are independent of particular devices that might be used in an application. Device drivers are then used to convert normalized coordinates to integer device coordinates.

An initial modeling-coordinate position (x_{mc}, y_{mc}) in this illustration is transferred to a device coordinate position (x_{dc}, y_{dc}) with the sequence:

$$(x_{mc}, y_{mc}) \rightarrow (x_{wc}, y_{wc}) \rightarrow (x_{nc}, y_{nc}) \rightarrow (x_{dc}, y_{dc})$$

PHIGS Workstations


Generally, the term workstation refers to a computer system with a combination of input and output devices that is designed for a single user. Some graphics systems, such as PHIGS and GKS, use the concept of a “workstation” to specify devices or software that are to be used for input or output in a particular application. A workstation identifier in these systems can refer to a file; a single device, such as a raster monitor; or a combination of devices, such as a monitor, keyboard, and a mouse. Multiple workstations can be open to provide input or to receive output in a graphics application.

Color Models


A color model is a method for explaining the properties or behavior of color within some particular context. No single color model can explain all aspects of color, so we make use of different models to help describe the different perceived characteristics of color.

Physical properties of light

- White light consists of a spectrum of all visible colors.
- All kinds of light can be described by the energy of each wavelength.

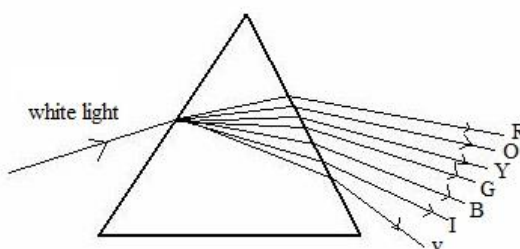

Most light we see is not just a single wavelength, but a combination of many wavelengths like below. This profile is often referred to as a spectrum, or spectral power distribution.

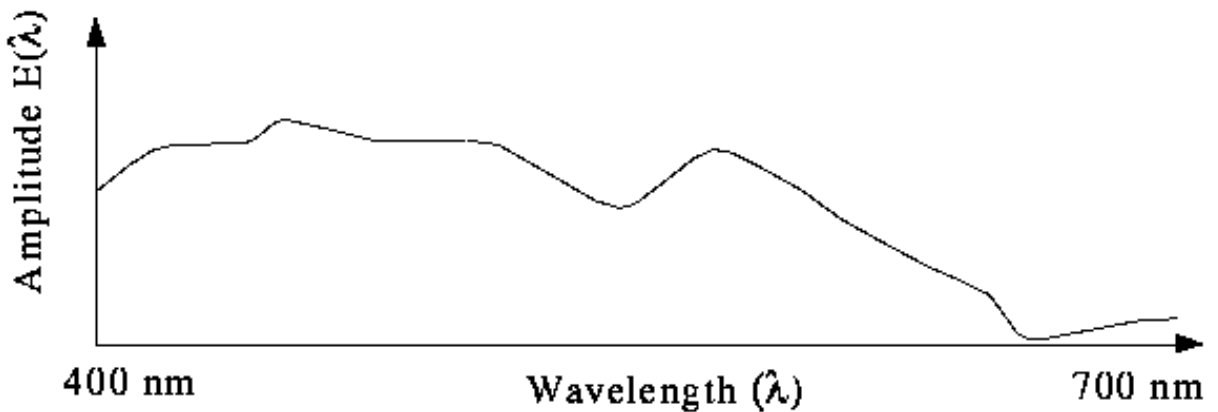


Frequency:

- Red: 3.8×10^{14} hertz
- Violet: 7.9×10^{14} hertz

Wavelength:

- Red: 700 nm
- Violet 400 nm


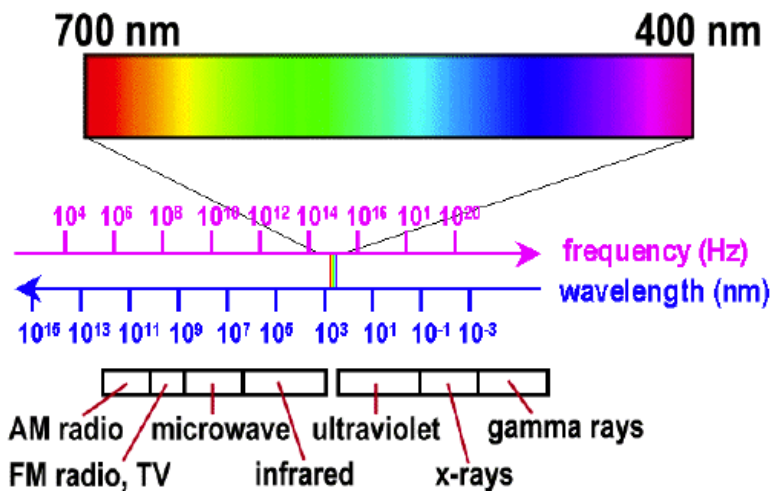


➤ There are two types of color models: **Subtractive** and **Additive**.

Additive color models use light to display color while subtractive models use printing inks. Colors perceived in additive models are the result of transmitted light. Colors perceived in subtractive models are the result of reflected light.

RGB (Red, Green, Blue) color model



- The RGB color model used in color CRT monitors.
- In this model, Red, Green and Blue are added together to get the resultant color white.

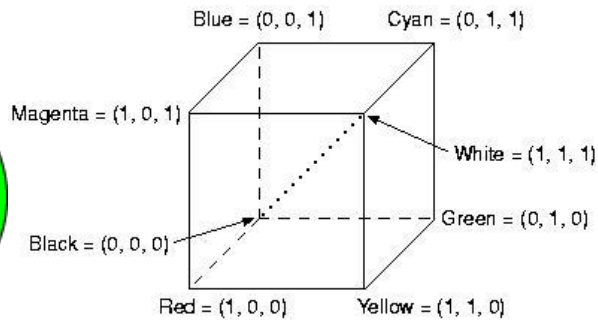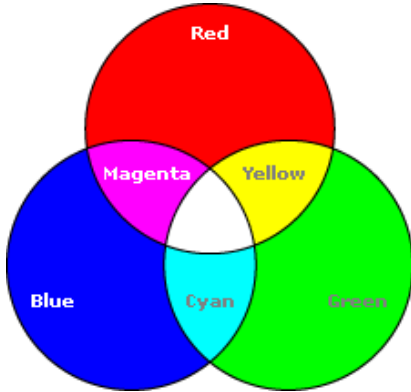

- Each color point within the bounds of the cube is represented as the triple (R, G, B), where value for R, G, B are assigned in the range from 0 to 1.
- Here RGB color place together at 120 degree.
- All other colors are generated from these three primary colors.

CMY (Cyan, Magenta, Yellow) color model

- The CMY color model used in color printing devices.
- In his model, Cyan, Magenta, and Yellow are added together to get the resultant color BLACK.

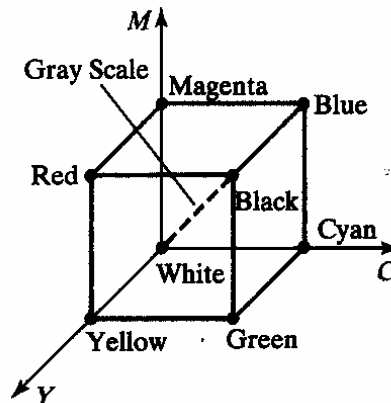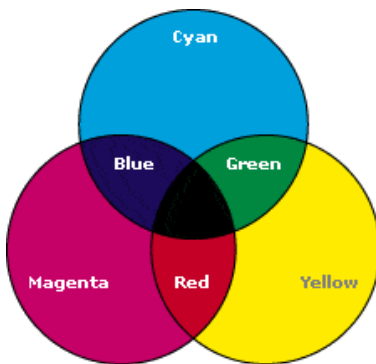

Relation between RGB and CMY:


$$\begin{pmatrix} c \\ m \\ y \end{pmatrix} = \begin{pmatrix} 1 \\ 1 \\ 1 \end{pmatrix} - \begin{pmatrix} r \\ g \\ b \end{pmatrix}$$

CMYK (Cyan, Magenta, Yellow, Black) color model

- For printing and art industry the CMY model is not enough. So, fourth primary color K (Black) is added to CMY model.
- CMYK (subtractive color model) is the standard color model used in offset printing for full-color document. Because such printing uses inks of these four basic colors, it is often called **four-color printing**.

HSV (Hue, Saturation, Value) color model

- HSV is a cylindrical coordinate representation of points in an RGB color model.
Hue: the dominant color as perceived by an observer
Saturation: the amount of white light mixed with Hue
Value: the chromatic notion of intensity
- HSV is described by a hexacone derived from the RGB cube.
- (h, s, v) , where $h \in [0, 360)$ and $s, v \in [0, 1]$
hue: angle round the hexagon
saturation: distance from the center
value: axis through the center

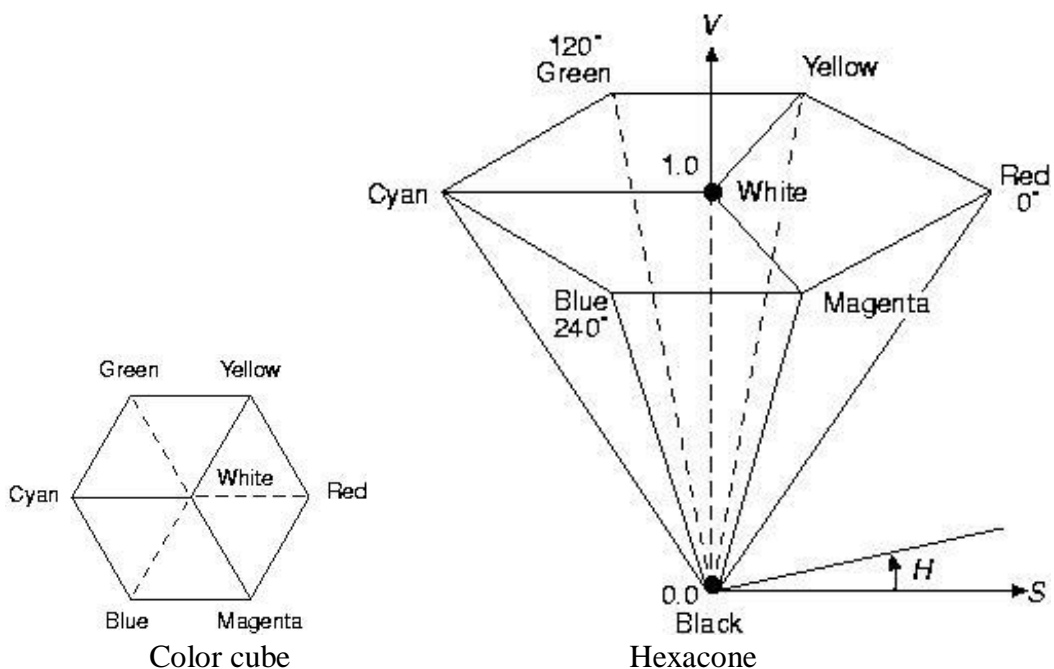

References

- **Donald Hearne and M.Pauline Baker**, “Computer Graphics, C Versions.” Prentice Hall
-